

Series 4900 Pneumatic Pressure Controllers

Series 4900 pneumatic pressure controllers combine reliable, low-emission operation with service-enhanced design. Series 4900 controllers provide control in proportional-only, proportional plus integral (reset), differential gap or transmitter modes. Standard pressure ratings up to 5,000 psig are available with 316 SST Bourdon tube sensing elements (consult Norriseal for higher pressure ratings). Weather-resistant enclosures assure reliable operation in harsh environments.

Models

Model 4950	Proportional-Only Control
Model 4960	Proportional-Plus-Reset Control

Actuator features

Proportional Only Control or Proportional-Plus-Reset Controllers



- 3 to 15 psig
- 6 to 30 psig

Features

- Flush-mounted internals and open design allow easy access and repair
- Removable door
- Easy, field-reversible action
- Significantly reduced leak paths minimize bleeding of valuable gases
- NACE MR0175-2002 compliance with optional diaphragm seals to isolate the sensing element
- Optional instrument air regulator

Action (Field reversible)

- Direct-increasing sensed pressure produces increasing output signal
- Reverse-increasing sensed pressure produces decreasing output signal

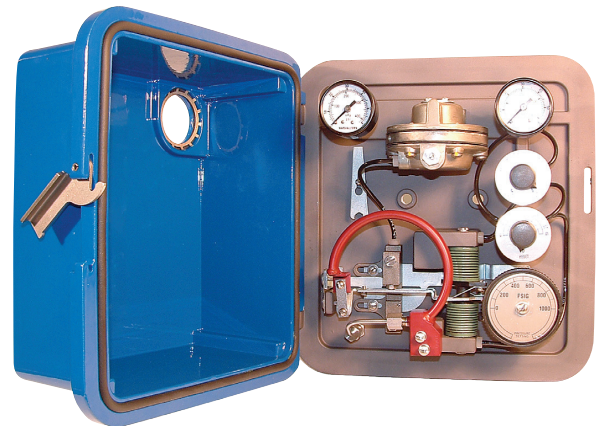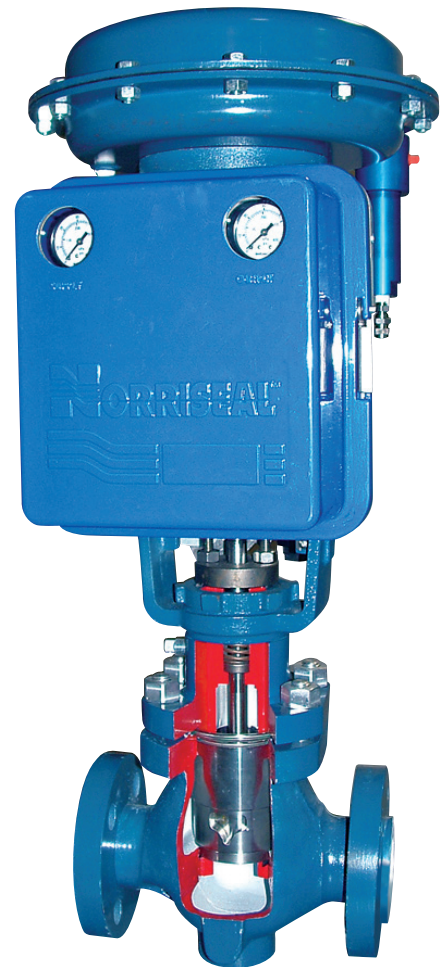

Specifications

Proportional Band Adjustment: 3 to 100% (3 to 15 psig) or 6 to 100% (6 to 30 psig) of sensing element range

Repeat Adjustment: 0.01 to 100 repeats per minute (0.01 to 74 minutes per repeat)

Remote Set Point Signal: 3 to 15 psig for controller with 3 to 15 psig output signal; 6 to 30 psig for controller with 6 to 30 psig output signal

Ambient Operating Temperature Range:

- Standard: -10 to 160°F (-40 to 71°C)
- High Temperature: 0 to 220°F (-18 to 104°C)

Typical Ambient Temperature Operating Effect:

- Proportional Control Only: Output pressure changes $\pm 3.0\%$ of sensing element rating for each 50°F (28°C) change for a controller set at 100% Proportional Band)

- Reset Control Only: Output pressure changes $\pm 2.0\%$ of sensing element rating for each 50°F (28°C) change for a controller set at 100% Proportional Band

Supply and Output Connections:

- 1/4 inch NPT female

Supply and Output Gauges:

- Available with scale indications of psig, kg/cm², kPa


Mounting: Wall, panel, or directly yoke or diaphragm case of valve

Options


- Compliance with NACE MR-0175 with diaphragm seals to isolate sensing element
- Norriseal Instrument Air Regulator

MATERIALS		
CONSTRUCTION MATERIALS		
	PART	MATERIAL
In Contact with Process	Bourdon Tube	316 Stainless Steel or K-Monel - NACE (Optional)
	Control Tubing (Pressure Block to Sensing Element)	316 Stainless Steel
In Contact with Operating Medium	Pressure Block	316 Stainless Steel
	Other Internal Tubing	Polyurethane Tubing or 316 Stainless Steel (Optional)
	Relay Seat	316 Stainless Steel
	Nozzle and Action Reversing Block	316 Stainless Steel
	Relay Springs	302 Stainless Steel
	Relay Springs Plate and Cap	302/304 Stainless Steel
	Relay Diaphragm	Nitrile/Nylon (Standard), Polyacrylate/Nylon (High Temp)
	Bellow, Proportional and Reset	316 Stainless Steel
	Proportional Valve Assembly	302/303 Stainless Steel & Brass
	Reset Valve Assembly	302/303 Stainless Steel & Brass
	O-Rings	Nitrile (Standard) or Viton(2) (High Temp)
	Gaskets	Neoprene (Standard), Silicone (High Temp)
Other	Case & Cover	Aluminum, Except Acrylic Gauge Windows
	Flapper	302 Stainless Steel
	Other Exposed Steel Items	Zinc Plated Steel

Model 4950

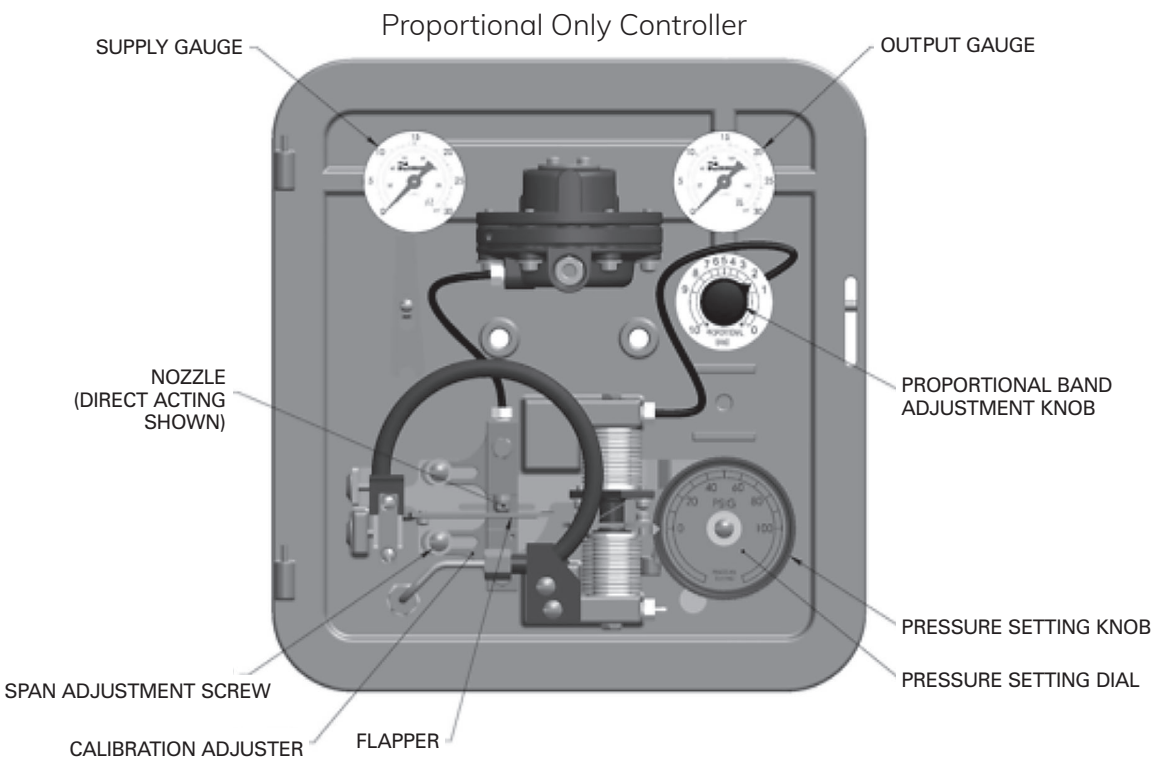

Model 4960

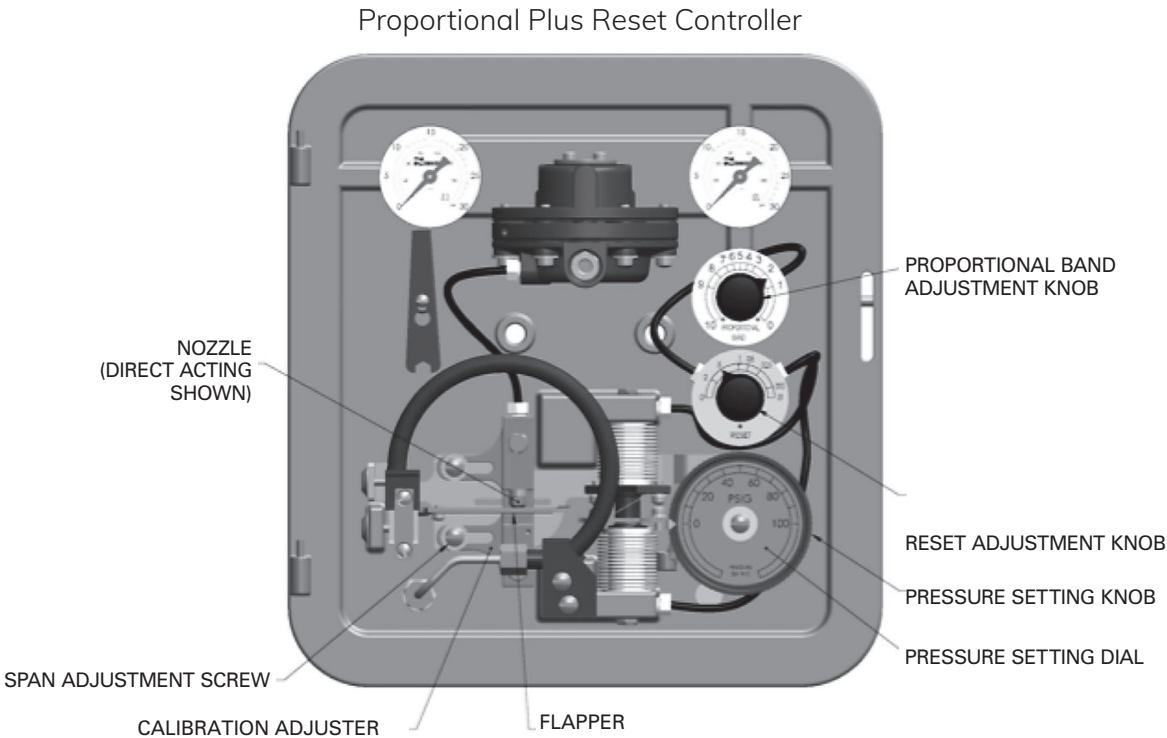


Model code

STANDARD STAINLESS STEEL BOURDON TUBE RANGES		
Maximum Allowable Static Pressure ⁽²⁾ Limits ⁽³⁾		
PRESSURE RANGES ⁽¹⁾ Psig	STANDARD Psig	WITH OPTIONAL TRAVEL STOP ⁽⁴⁾ Psig
0 to 30	30	48
0 to 60	60	96
0 to 100	100	160
0 to 200	200	280
0 to 300	300	420
0 to 600	600	720
0 to 1000	1000	1200
0 to 1500	1500	1650
0 to 3000	3000	3300
0 to 5000	5000	5500

1. Range marked on Bourdon tube may be in kPa (1 bar=100 kPa)
2. As defined in ISA Standard S51.-1979
3. Bourdon tube may be pressured to limit shown without permanent zero shift
4. Travel stop set at 110% of range
5. Consult Norriseal for ranges not listed above

Mounting Options

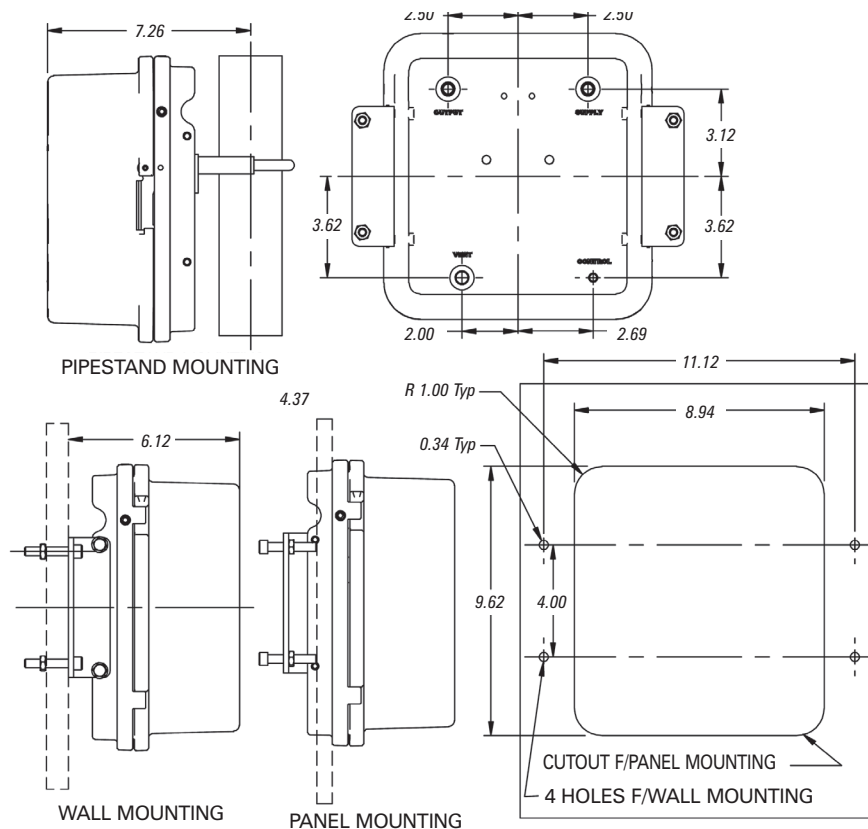

Note: All Connections are 1/4 NPT Female

Panel, Wall & Pipe Stand Mounting

Model code

4950 D 100 — A — OS

A
B
C
D
E
F
G

A CONTROL MODE

Code	Style
50	Proportional Band Only
60	Proportional-Plus-Reset

B ACTION

Code	Type
D	Direct
R	Reverse

C ELEMENT RANGE (BOURDON TUBE)

Code	Psig
003	0 – 30
006	0 – 60
010	0 – 100
020	0 – 200
030	0 – 300
060	0 – 600*
100	0 – 1000*
150	0 – 1500*
300	0 – 3000
500	0 – 5000

* Available in K-Monel Material as alternative

D SERVICE CONDITION

Code	Type
-	Standard
N	NACE (316SS Bourdon Tube)
K	NACE (K MONEL Bourdon Tube) 0-600, 0-1000, 0-1500 Tube Ranges

E OUTPUT

Code	Type
A	3-15 PSIG
B	6-30 PSIG

F PRESSURE GAUGE MATERIAL

Code	Type
-	Bronze
D	Bronze Liquid Filled
G	SST Liquid Filled
S	SST

G SPECIAL OPTIONS

Code	Type
-	None
OS	Over Travel Stop
AW	Anti-Reset Windup
DS	Diaphragm Seal
ST	Stainless Steel Tubing

SUPPLY PRESSURE REQUIREMENTS				
OUTPUT SIGNAL	SUPPLY PRESSURE ⁽¹⁾	MAXIMUM ALLOW ⁽²⁾	STEADY-STATE CONSUMPTION ⁽³⁾	
			Min.	Max.
3 to 15 psig 0 to 20 psig	20 psig	50 psig	4.2 SCFH	27.0 SCFH
6 to 30 psig 0 to 35 psig	35 psig	50 psig	7.0 SCFH	42.0 SCFH

1. Normal operating pressure. If this pressure is exceeded, control and stability may be impaired
 2. If this pressure is exceeded, internal part damage may occur
 3. SCFH of Air at 60° F and 14.7 psig

Why you can depend on genuine Norriseal-Wellmark products

- In-house engineering and technical support
- In-depth applications experience
- Award-winning innovation and ongoing product development
- ISO 9001 certified manufacturing
- Over five decades of industry service
- Compliance with all industry standards and specifications
- Responsive service and prompt delivery
- Field support available worldwide

Contact Norriseal-Wellmark for more information about our products and services.

Texas

Houston 713-466-3552

Oklahoma

Oklahoma City 405-672-6660

Louisiana

Broussard 337-837-3223



Follow us on LinkedIn.

Request for Quote

NRS_RFQ@championx.com



NorrisealWellmark.com

Norriseal-Wellmark | 11122 W Little York Rd | Houston, TX 77041

This document is provided on an "as is" basis without warranties of any kind. Norriseal-Wellmark DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR SUITABILITY FOR ANY PURPOSE, TITLE, AND NON-INFRINGEMENT. While reasonable care has been taken in the preparation of this document, Norriseal-Wellmark does not represent or warrant that the contents of this document are accurate, complete, reliable, current or error-free.